





SOLIDS TATE DRIVE

Unidad de Estado Sólido



SOLIDS TATE DRIVE

Unidad de Estado Sólido

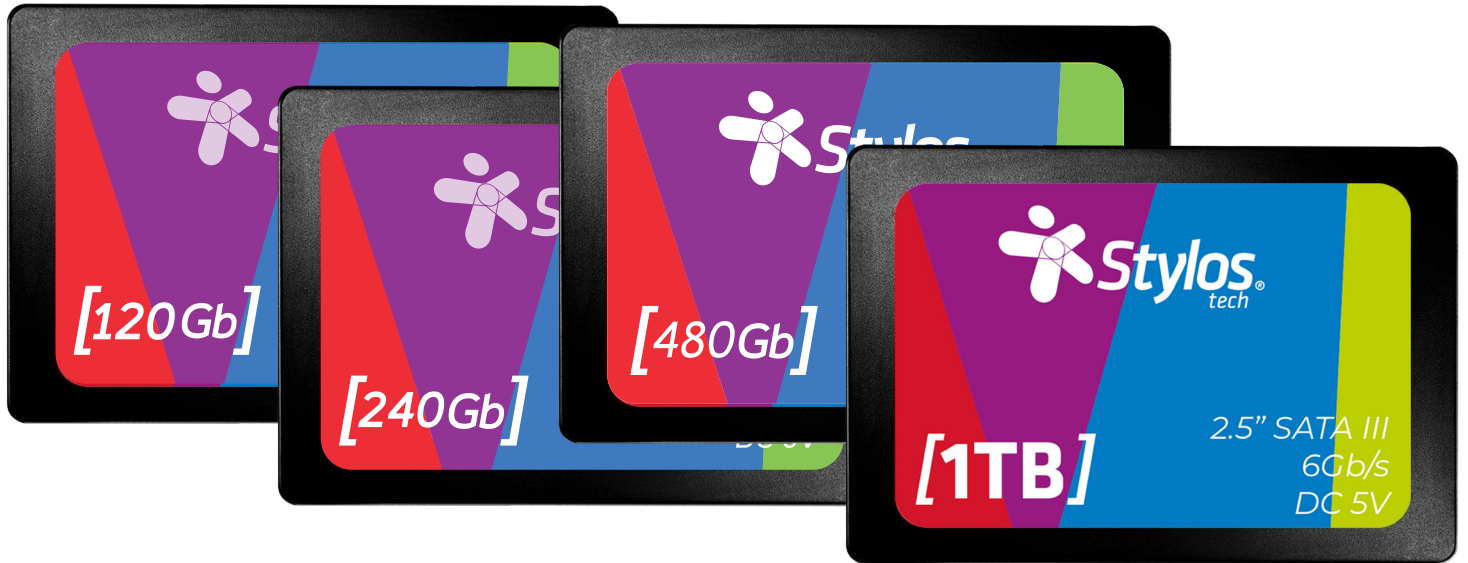



SOLIDS TATE DRIVE

Unidad de Estado Sólido

Soporta funciones S.M.A.R.T., Trim Command, NCQ
Corrección de errores configurable, o Sobreprovisionamiento configurable por el usuario.
Avanzada tecnología de nivelación de desgaste.

Especificaciones

| | | | |
|-------------|-------------------|-------------------------------|----------|
| Interfaz | SATA III | Voltaje | DC 5V |
| Dimensiones | 100 X 69.9 X 7 cm | Temperatura de funcionamiento | 0°C~70°C |
| | | 4Kb Random Read IOPS | 70000 |
| | | 4KBb Random Write IOPS | 5000 |

Medidas 12 x 10 2.3 cm Peso de producto 300gr Corrugado Dependencia de las piezas



SOLIDS TATE DRIVE

Unidad de Estado Sólido



120 Gb

| | |
|-------------------|---------|
| Sequential Read: | 510MB/s |
| Sequential Write: | 460MB/s |
| Response Time: | 0.2ms |

480 Gb

| | |
|-------------------|---------|
| Sequential Read: | 560MB/s |
| Sequential Write: | 510MB/s |
| Response Time: | 0.2ms |

240 Gb

| | |
|-------------------|---------|
| Sequential Read: | 520MB/s |
| Sequential Write: | 460MB/s |
| Response Time: | 0.2ms |

1Tb

| | |
|-------------------|---------|
| Sequential Read: | 560MB/s |
| Sequential Write: | 510MB/s |
| Response Time: | 0.2ms |

| | SKU | Ean13 | Dun14 |
|---------|----------------|---------------|-------|
| Modelo: | 120Gb STMSSD1B | 7503028126699 | |
| | 240Gb STMSSD2B | 7503028126705 | |
| | 480Gb STMSSD3B | 7503028126712 | |
| | 1Tb STMSSD4B | 7503041018292 | |